

PAVIGYM ENDURANCE S&S



PAVIGYM
WALNUT



PAVIGYM
WENGUE



PAVIGYM
STONE G



PAVIGYM
B. MARBLE

SPECIAL COLOUR



PAVIGYM
CYAN



PAVIGYM
LIME



PAVIGYM
RED



PAVIGYM
BEECHWOOD




EXTRA-THICKNESS FOR MORE PROTECTION AGAINST IMPACTS FOR HEAVY LOADS

Unique aesthetics for **free weight** & **power lifting areas** where increased sound and vibration absorption is essential.


TECHNICAL INFO.

| | | |
|----------------------------------|------------|-----------------------|
| WEIGHT | | 15,5 kg |
| DENSITY | UNE-53526 | 900 kg/m ³ |
| HARDNESS | DIN 53505 | 75° Shore A |
| WATER ABSORPTION | ASTM D570 | 0% |
| COEFFICIENT OF LINEAR DILATATION | 0°C-40°C | 10=4 oC-1 |
| FIRE REACTION | EN 13501-1 | Cfl |
| FORMALDEHYDE EMISSION | EN 717-2 | <0,5 |
| SOUND INSULATION | ISO 10140 | 21 dB |

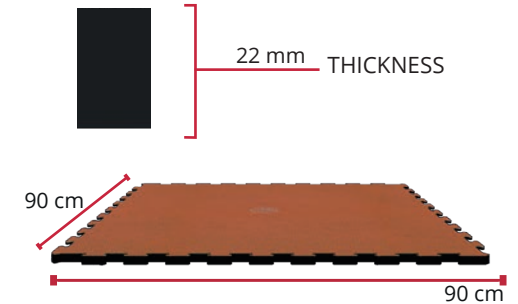

COMPARATIVE CHART.

| | PAVIGYM ENDURANCE S&S | PAVIGYM ENDURANCE | RECYCLED RUBBER (ROLLS) |
|------------------------------------|-----------------------------|----------------------|-------------------------------|
| COMFORT | ***** | *** | ** |
| MARKS RESISTANCE (Medium Loads) | ***** | **** | *** |
| MARKS RESISTANCE (Heavy Loads) | **** | *** | ** |
| SOUND INSULATION | ***** | *** | ** |
| DURABILITY | ***** | **** | *** |
| HYGIENIC/ANTI-BACTERIAL PROTECTION | ***** | ***** | ** |
| THERMAL INSULATION | ***** | ***** | *** |
| WATER RESISTANCE | ***** | ***** | *** |
| EASY TO INSTALL & MAINTAIN | ***** | ***** | ** |



INTERLOCKING SYSTEM



POWER LIFT AREA



FREE WEIGHT AREA